


ENEE381

Lecture 7

Reflections at Boundaries

Review: Normal Incidence Linear Polarization

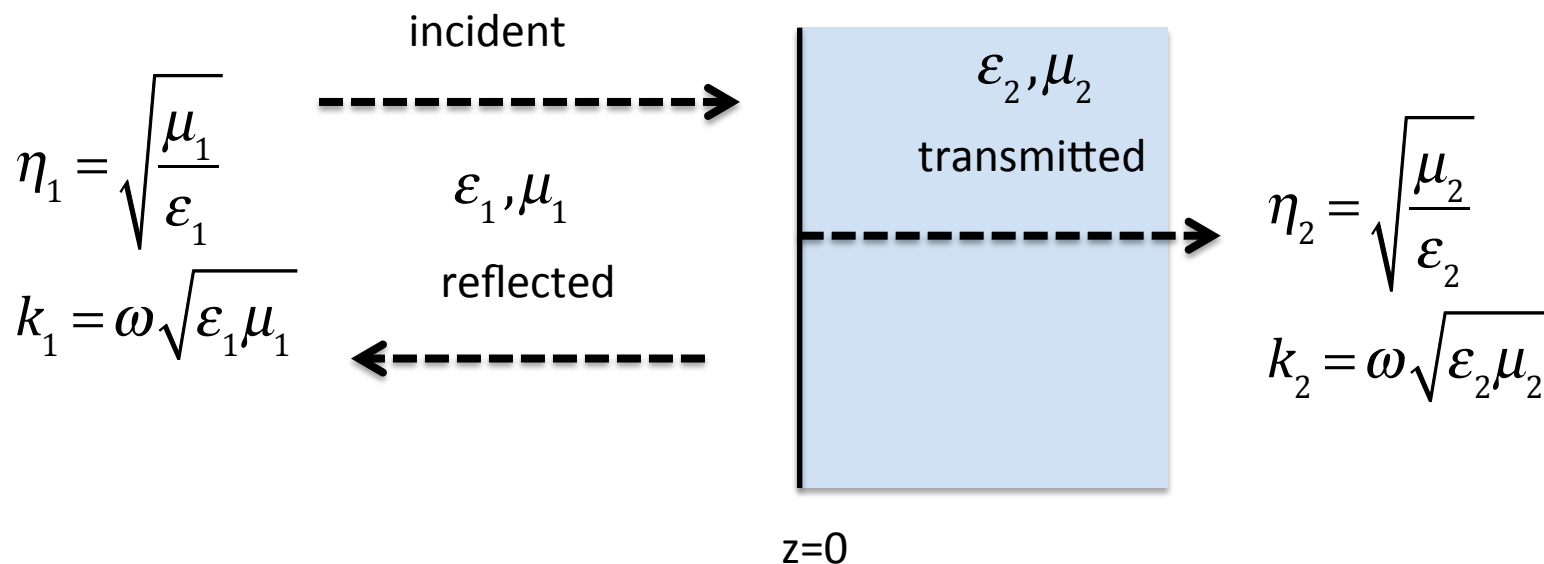

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$H_y = \text{Re} \left\{ \frac{1}{\eta_1} \left(\hat{E}_{inc} e^{ik_1 z} - \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \left(\hat{E}_{trans} e^{ik_2 z} \right) e^{-i\omega t} \right\}$$

$$H_y = \text{Re} \left\{ \frac{1}{\eta_2} \left(\hat{E}_{trans} e^{ik_2 z} \right) e^{-i\omega t} \right\}$$

At $z=0$ tangential E and tangential H are continuous

At $z=0$ tangential E and tangential H are continuous

$$\begin{aligned}\hat{E}_{inc} + \hat{E}_{ref} &= \hat{E}_{trans} \\ \frac{\hat{E}_{inc} - \hat{E}_{ref}}{\eta_1} &= \frac{\hat{E}_{trans}}{\eta_2}\end{aligned}$$

solve



$$\begin{aligned}\frac{\hat{E}_{ref}}{\hat{E}_{inc}} &= \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} \equiv \rho \\ \frac{\hat{E}_{trans}}{\hat{E}_{inc}} &= \frac{2\eta_2}{\eta_2 + \eta_1} \equiv \tau = 1 + \rho\end{aligned}$$

$$\begin{aligned}P_{inc} &= \frac{|\hat{E}_{inc}|^2}{2\eta_1} \\ P_{ref} &= \frac{|\hat{E}_{ref}|^2}{2\eta_1} = |\rho|^2 P_{inc} \\ P_{trans} &= \frac{|\hat{E}_{trans}|^2}{2\eta_1} = (1 - |\rho|^2) P_{inc}\end{aligned}$$

$$\rho = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1}$$

Voltage Standing Wave Ratio (VSWR)

Pronounced "Vizwarr"

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} \left(e^{ik_1 z} + \rho e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$


Case #1 No reflection

Travelling Wave

Assume vacuum

Find: $k_1, \omega, |\hat{E}_x|$

Plots of $E_x(z,t)$ at different times

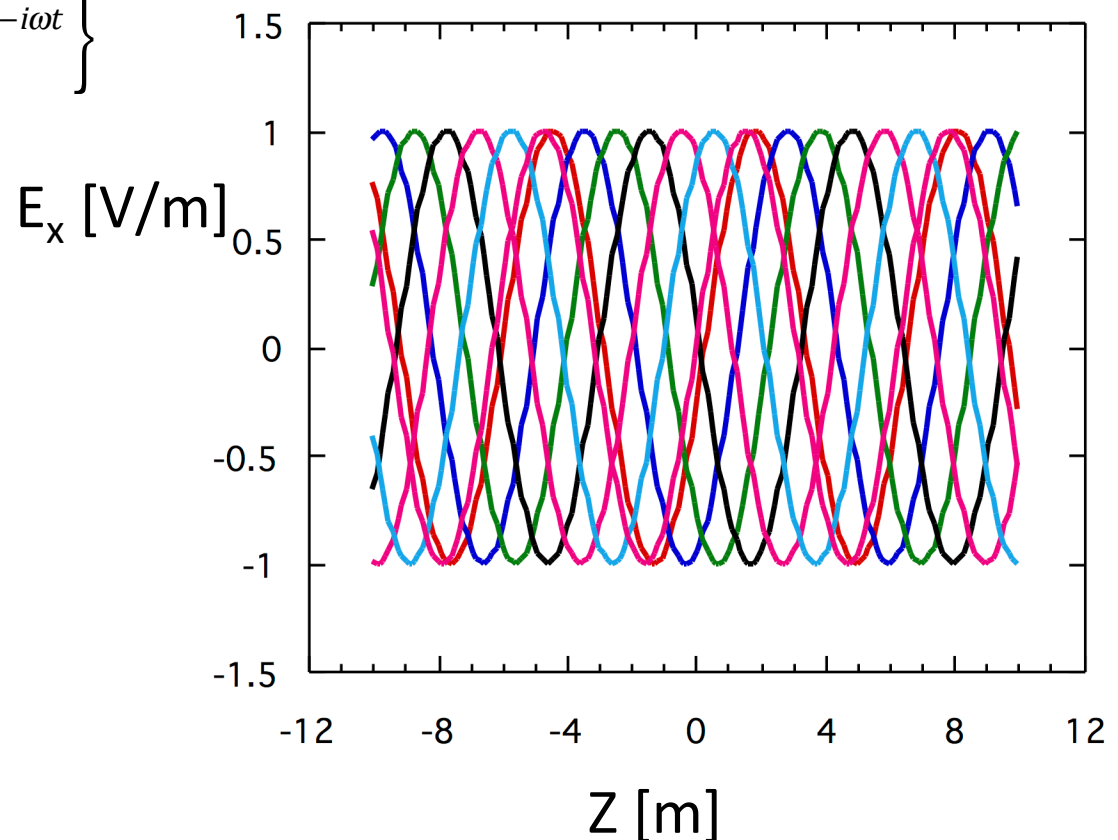

Voltage Standing Wave Ratio (VSWR)

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} \left(e^{ik_1 z} + \rho e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$


E_x [V/m]

Case #2 $\rho = 1$

Where do the waves interfere constructively, destructively?

How far apart between maxima, minima?

Plots of $E_x(z,t)$ at different times

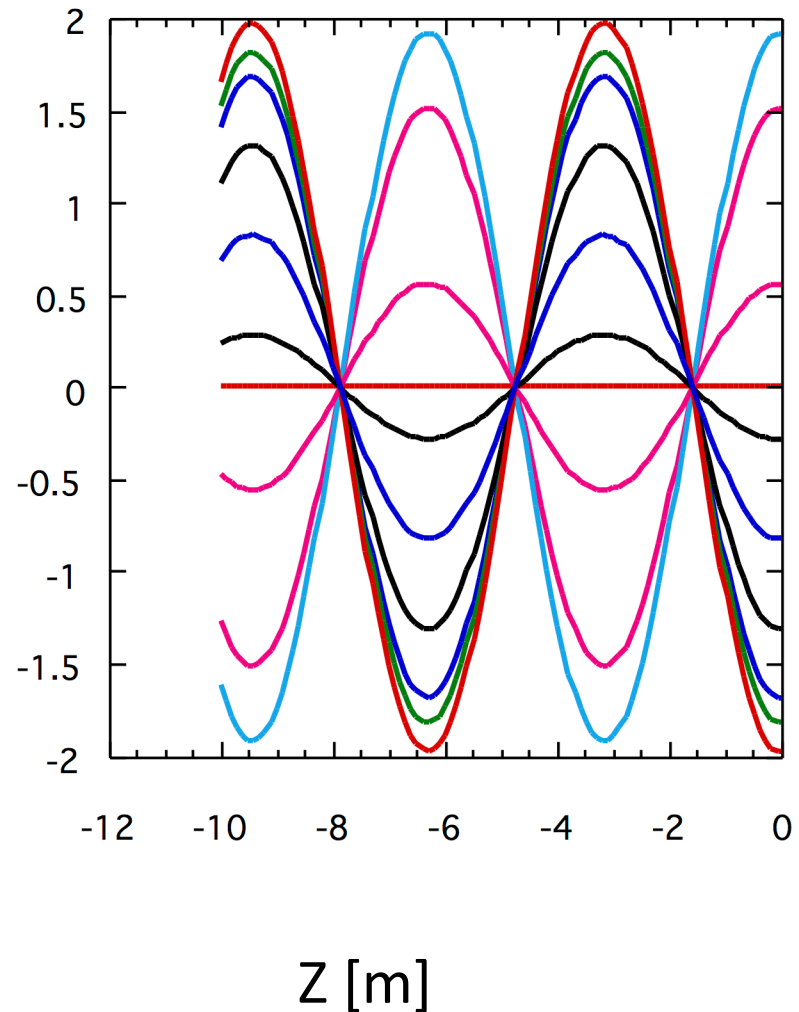

Voltage Standing Wave Ratio (VSWR)

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} \left(e^{ik_1 z} + \rho e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$


E_x [V/m]

Case #3 $\rho = -1$

Where do the waves interfere constructively, destructively?

How far apart between maxima, minima?

Plots of $E_x(z,t)$ at different times

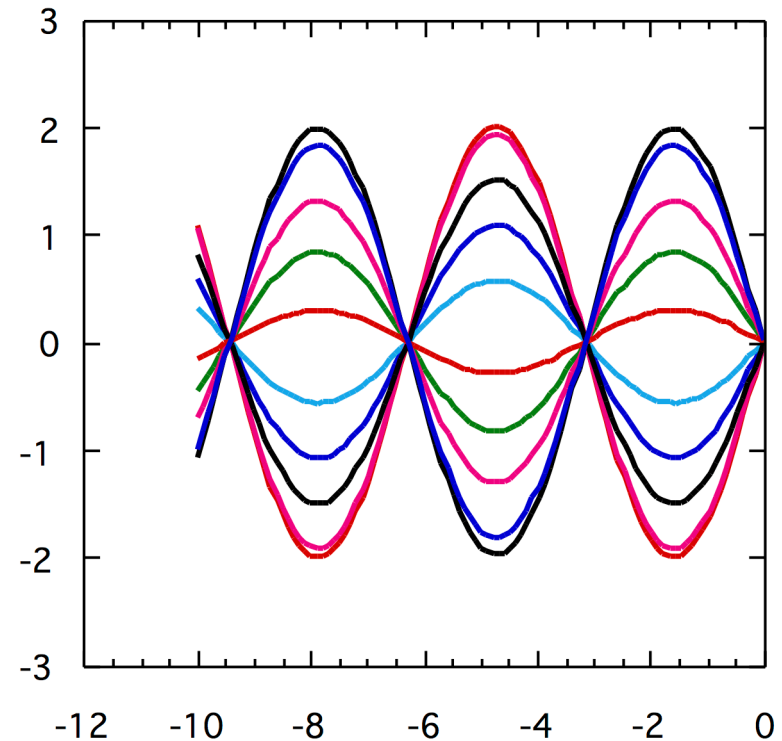

z [m]

Voltage Standing Wave Ratio (VSWR)

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} \left(e^{ik_1 z} + \rho e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$


E_x [V/m]

Case #3 $\rho = -0.5$

Where do the waves interfere
constructively, destructively?

How far apart between maxima,
minima?

Plots of $E_x(z,t)$ at different times

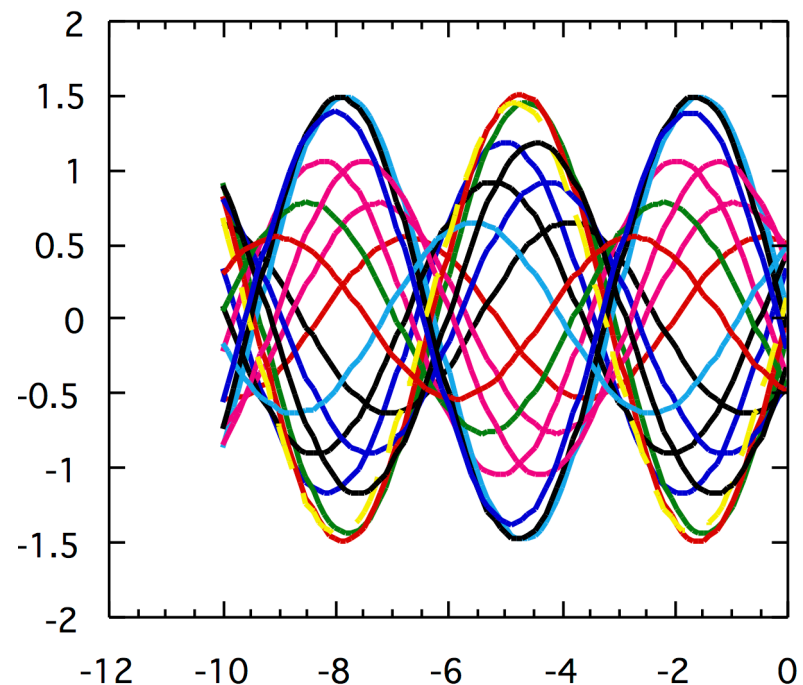

z [m]

Voltage Standing Wave Ratio (VSWR)

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} \left(e^{ik_1 z} + \rho e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$


$$E_x \text{ [V/m]}$$

$$\rho = -0.5$$

$$VSWR = \frac{E_{\max}}{E_{\min}} = \frac{1 + |\rho|}{1 - |\rho|} \geq 1$$

$$VSWR = \frac{1.5}{.5} = 3$$

Plots of $E_x(z,t)$ at different times

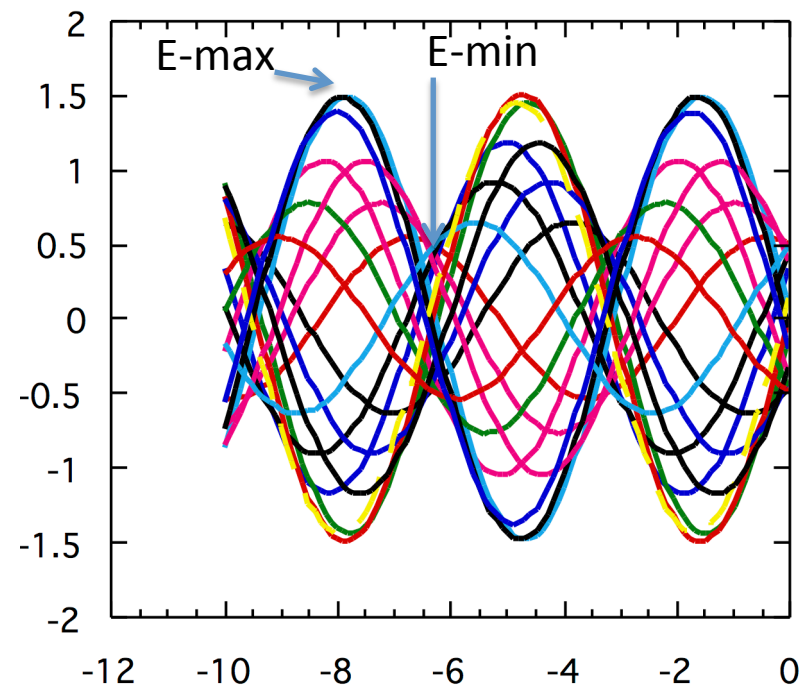

z [m]

Problem: where is E_{\max} , E_{\min} ?

$$E_x = \text{Re} \left\{ \left(\hat{E}_{inc} e^{ik_1 z} + \hat{E}_{ref} e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} \left(e^{ik_1 z} + \rho e^{-ik_1 z} \right) e^{-i\omega t} \right\}$$

$$\rho = |\rho| e^{i\theta_\rho}$$

$$E_x = \text{Re} \left\{ \hat{E}_{inc} e^{ik_1 z - i\omega t} \left(1 + |\rho| e^{i\theta_\rho - 2ik_1 z} \right) \right\}$$

$$\left(1 + |\rho| e^{i\theta_\rho - 2ik_1 z} \right) = \left| \left(1 + |\rho| e^{i\theta_\rho - 2ik_1 z} \right) \right| e^{i\alpha}$$

$$\hat{E}_{inc} e^{ik_1 z - i\omega t} \left(1 + |\rho| e^{i\theta_\rho - 2ik_1 z} \right) = \underbrace{\left| \hat{E}_{inc} \right| \left| \left(1 + |\rho| e^{i\theta_\rho - 2ik_1 z} \right) \right|}_{\text{Peak Electric field}} \exp \left(i \left(\theta_{E_{inc}} + k_1 z - \omega t + \alpha \right) \right)$$

Find the set of points where magnitude of E_x is maximum, minimum.

Find VSWR

Peak Electric field

VSWR and maxima, minima


$$\text{Peak-E}(z) = \left| \hat{E}_{inc} \right| \left| \left(1 + |\rho| e^{i\theta_\rho - 2ik_1 z} \right) \right|$$

$$\text{E-max} = \left| \hat{E}_{inc} \right| \left(1 + |\rho| \right), \quad e^{i\theta_\rho - 2ik_1 z} = 1,$$

$$\theta_\rho - 2k_1 z_{\max} = 2\pi n$$

$$\text{E-min} = \left| \hat{E}_{inc} \right| \left(1 - |\rho| \right), \quad e^{i\theta_\rho - 2ik_1 z} = -1,$$

$$\theta_\rho - 2k_1 z_{\min} = 2\pi n + \pi$$

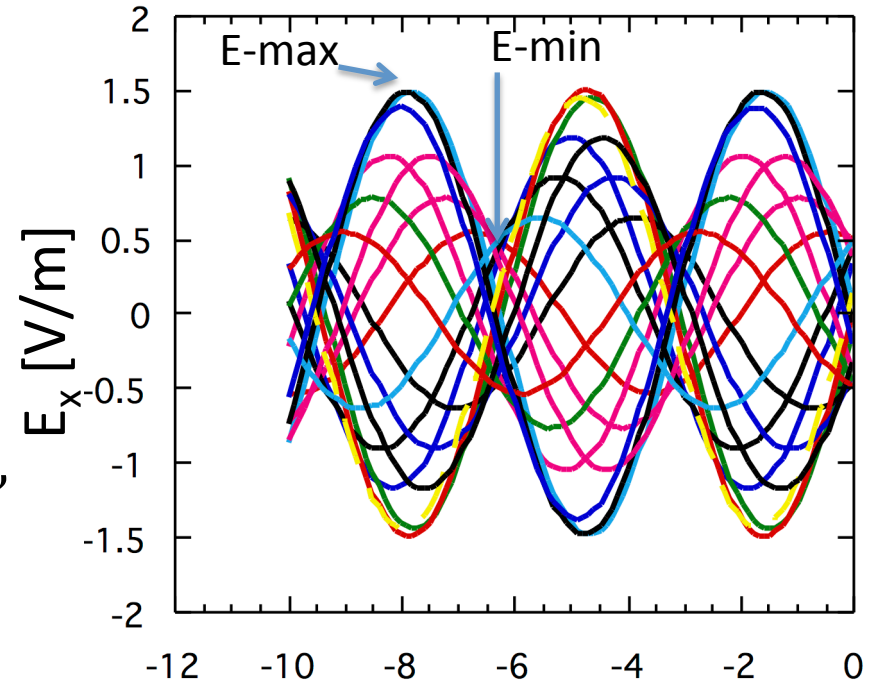

$$VSWR = \frac{\text{E-max}}{\text{E-min}} = \frac{(1 + |\rho|)}{(1 - |\rho|)}$$

$$|z_{\max}| = (\pi n - \theta_\rho / 2) / k_1$$

$$|z_{\min}| = \left(\pi \left(n + \frac{1}{2} \right) - \theta_\rho / 2 \right) / k_1$$

Z [m]

Features of Oblique Incidence

Specularly Reflected wave

Transmitted Wave is refracted (Snell's Law)

Polarization matters

Wave Impedance depends on polarization, angle of incidence


No reflection for special angle (Brewster's angle)

Oblique Incidence


$$\eta_1 = \sqrt{\frac{\mu_1}{\epsilon_1}}$$

$$k_1 = \omega \sqrt{\epsilon_1 \mu_1}$$

Polarizations
TE, E perpendicular
to Pol

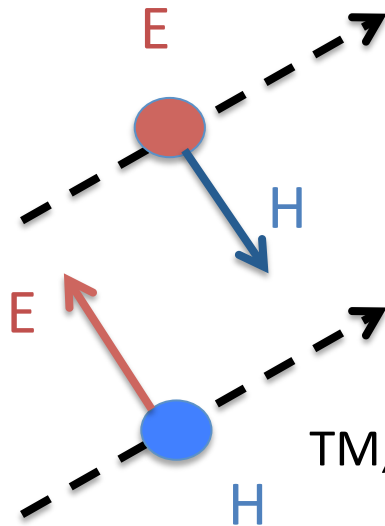

TM, E parallel to Pol

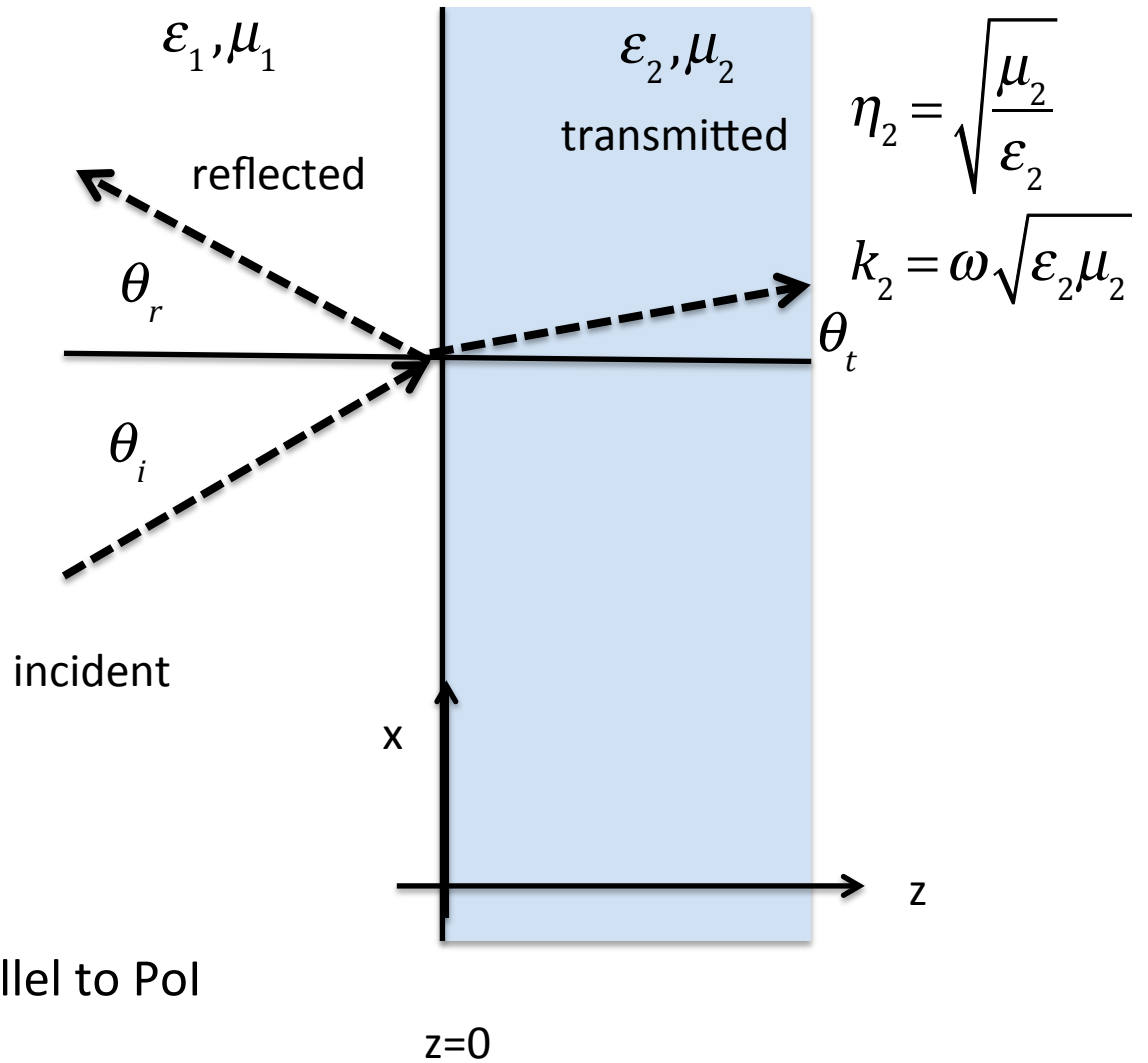

Angles of reflection/transmission

Region 1

$$\mathbf{E} = \text{Re} \left\{ \left(\hat{\mathbf{E}}_{inc} e^{i\mathbf{k}_i \cdot \mathbf{x}} + \hat{\mathbf{E}}_{ref} e^{i\mathbf{k}_r \cdot \mathbf{x}} \right) e^{-i\omega t} \right\}$$


Region 2

$$\mathbf{E} = \text{Re} \left\{ \left(\hat{\mathbf{E}}_{tran} e^{i\mathbf{k}_t \cdot \mathbf{x}} \right) e^{-i\omega t} \right\}$$

For boundary conditions at $z=0$ to be satisfied:

$$e^{ik_{ix}x} = e^{ik_{rx}x} = e^{ik_{tx}x}$$

$$k_{ix} = k_{rx} = k_{tx}$$

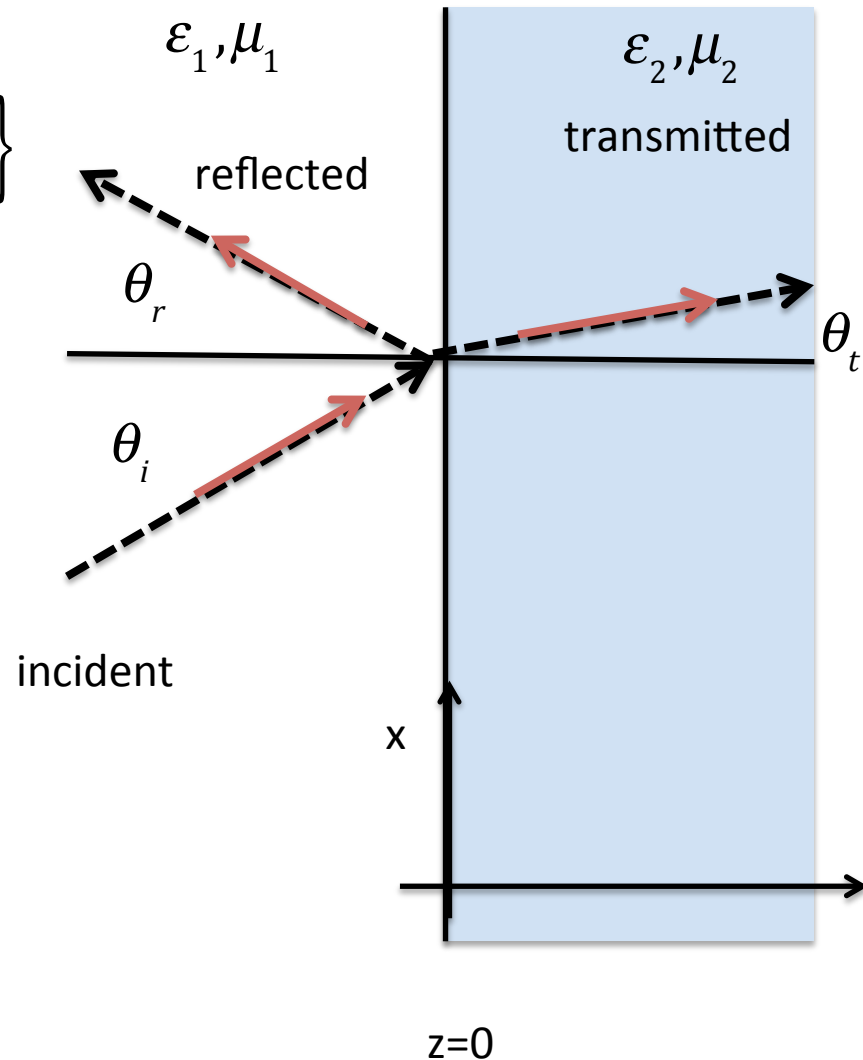

Angles of reflection/transmission

Region 1

$$k_{z,i/r} = \pm \sqrt{k_1^2 - k_x^2} \quad k_1^2 = \omega^2 \epsilon_1 \mu_1 = \omega^2 / v_1^2$$

Region 2


$$k_{z,t} = \pm \sqrt{k_2^2 - k_x^2} \quad k_2^2 = \omega^2 \epsilon_2 \mu_2 = \omega^2 / v_2^2$$

Snell's Law


$$\sin \theta_i = \frac{k_x}{k_1} = \frac{k_x}{\omega} v_1$$

$$\sin \theta_t = \frac{k_x}{k_2} = \frac{k_x}{\omega} v_2$$

$$\frac{\sin \theta_i}{v_1} = \frac{\sin \theta_t}{v_2}$$

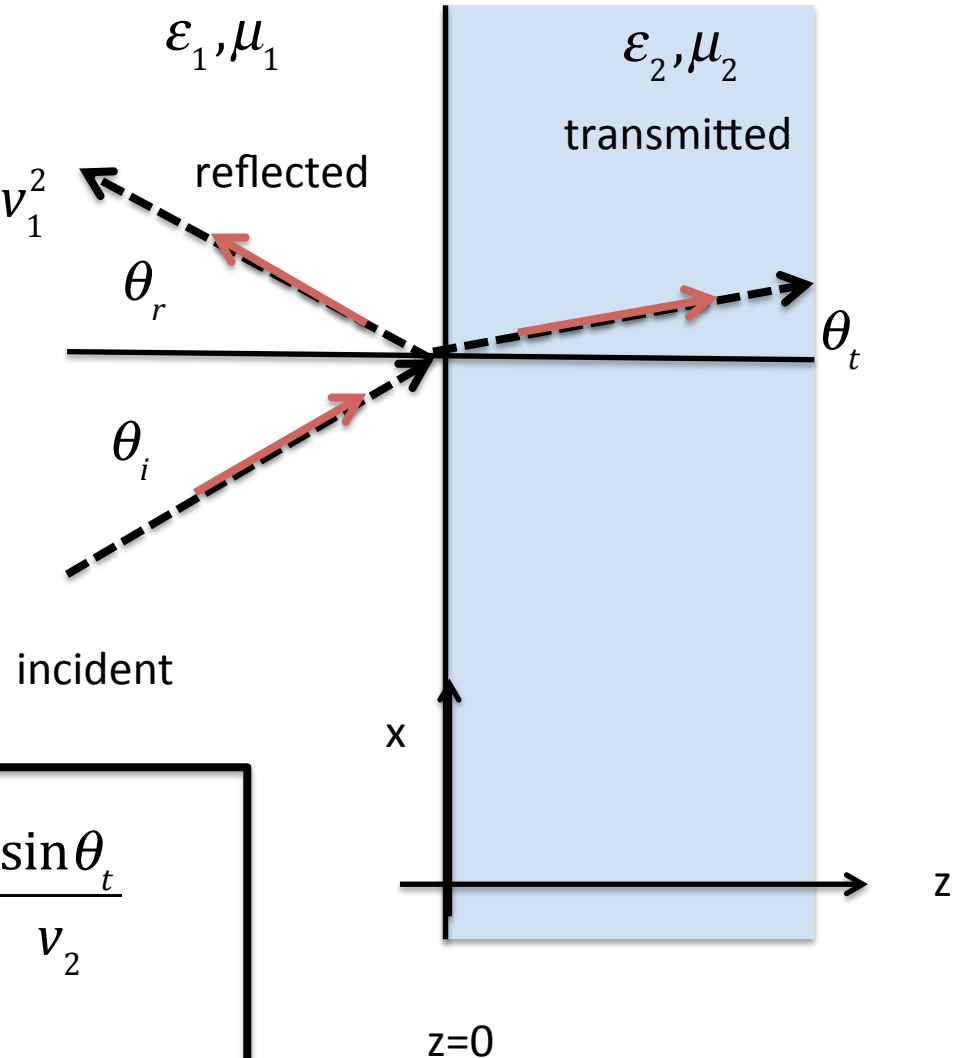

Why does angle of incidence = angle of reflection?

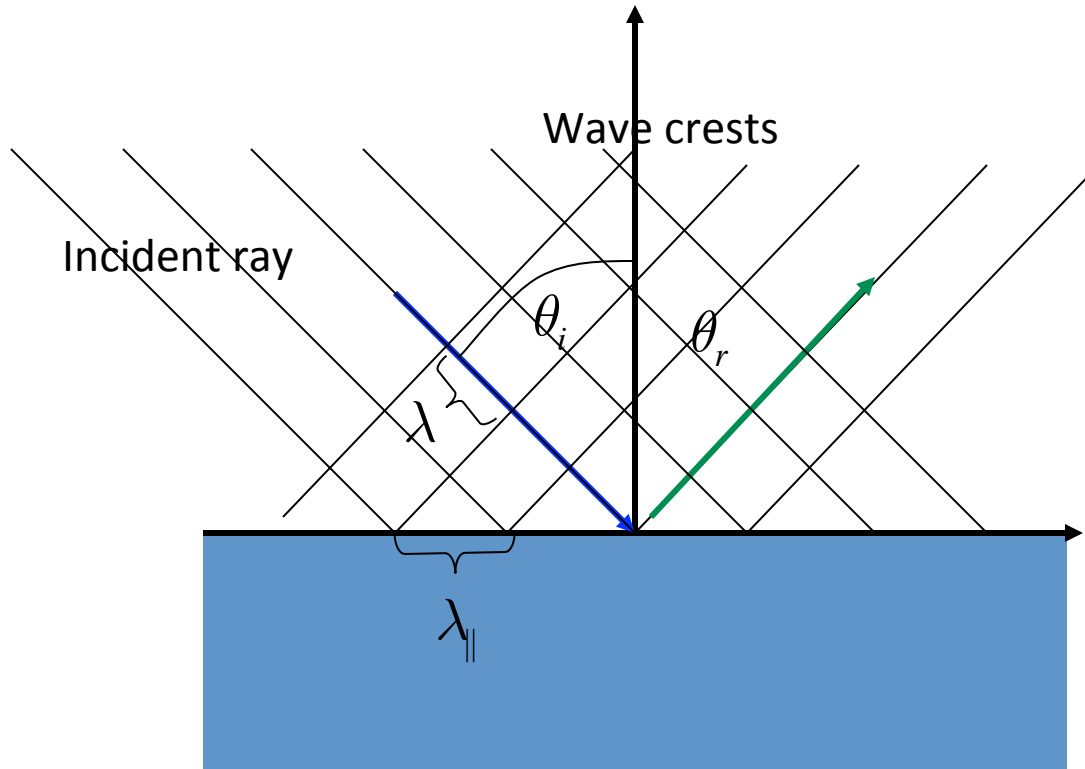


$$\lambda_{\parallel} = \frac{\lambda}{\sin \theta_i} = \frac{\lambda}{\sin \theta_r}$$

$$\theta_i = \theta_r$$

Incident and Reflected wave crests must match up along surface


geometry

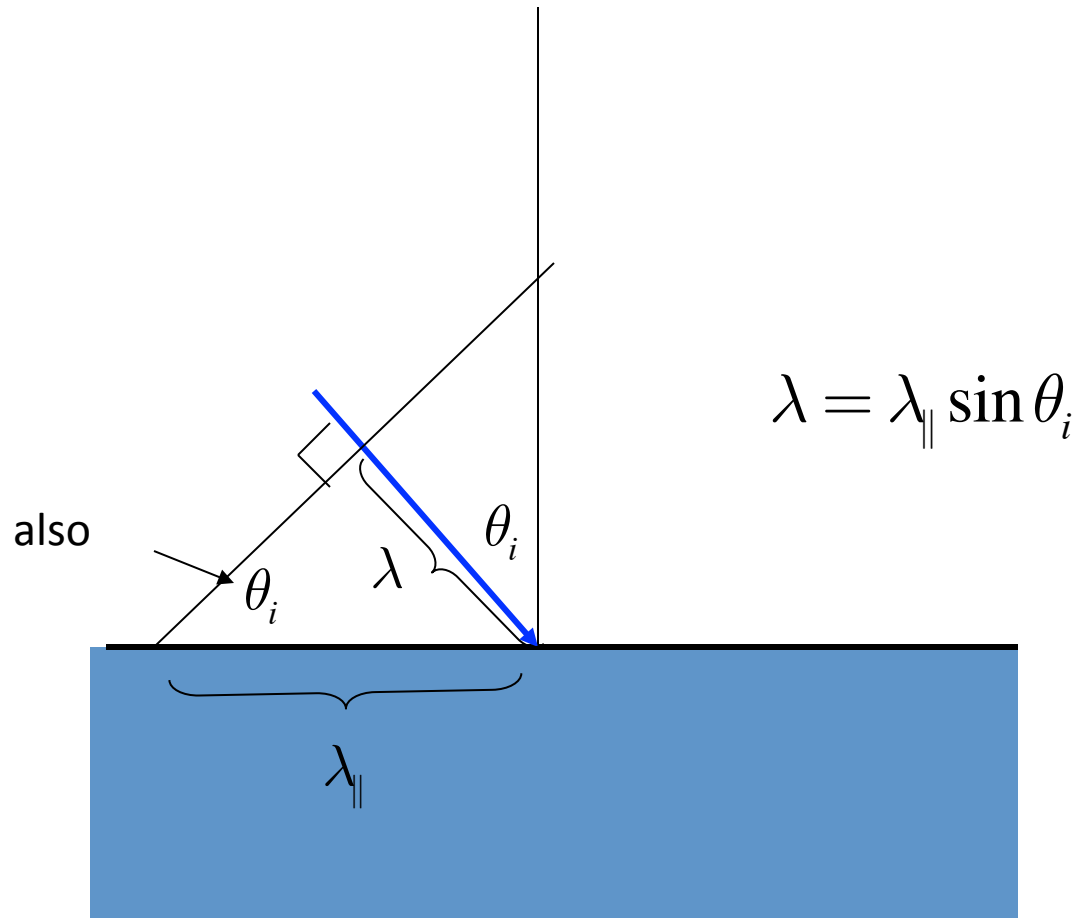

Snell's Law

$$n_1 \sin \theta_1 = n_2 \sin \theta_2$$


(b)

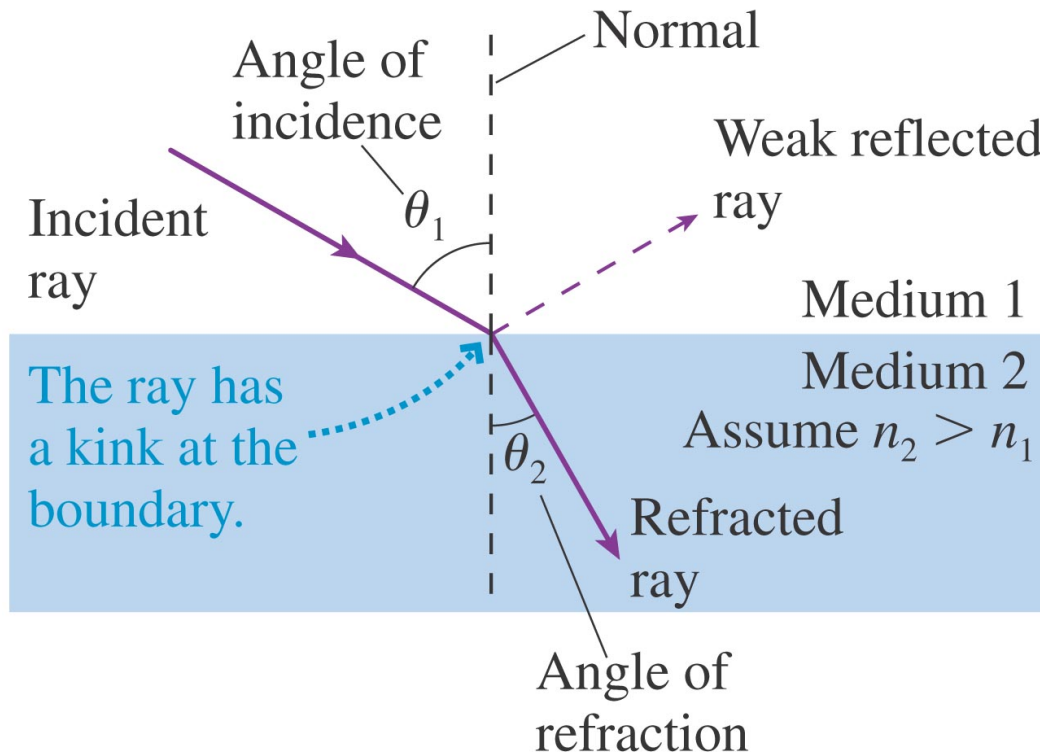

Remember definition of index of refraction

$$n = \frac{c}{v_{em}}$$

Why Snell's Law?

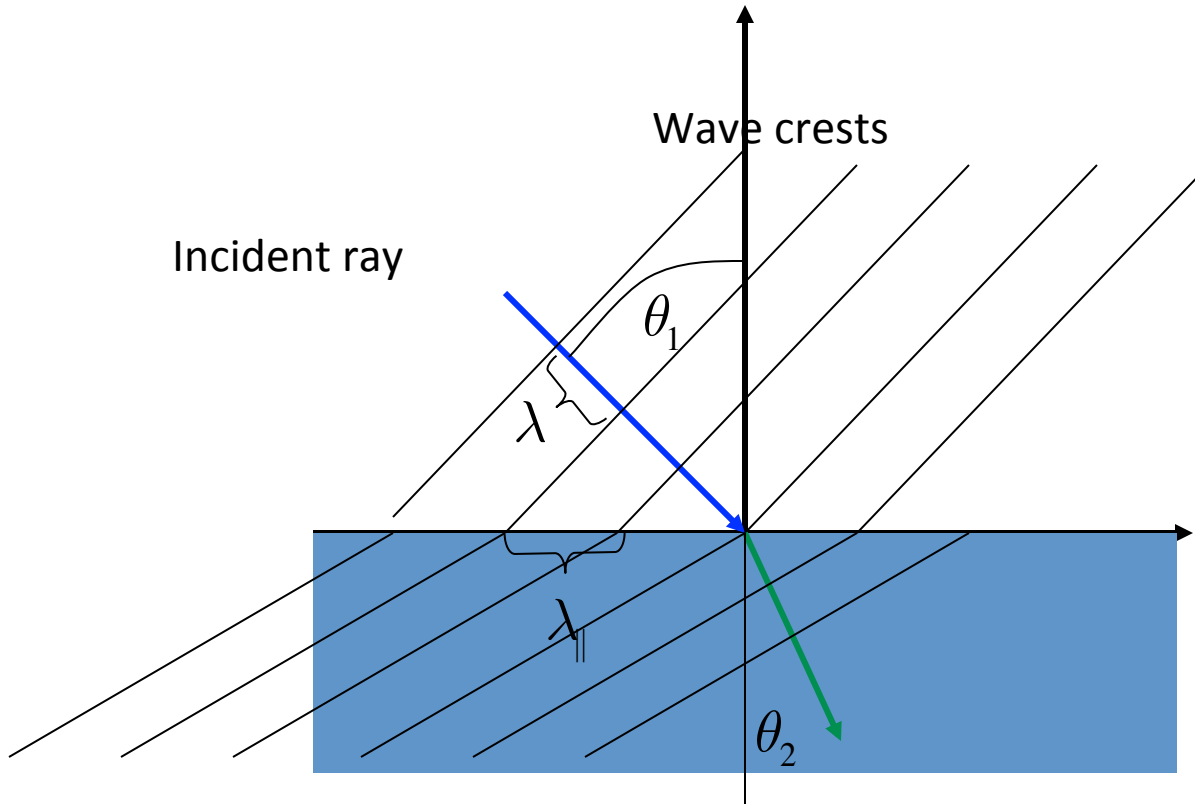

Incident and Transmitted wave crests must match up along surface


$$\lambda_{\parallel} = \frac{\lambda_1}{\sin \theta_1} = \frac{\lambda_2}{\sin \theta_2}$$

$$\lambda_1 = \frac{\lambda_{vac}}{n_1}$$

$$\lambda_2 = \frac{\lambda_{vac}}{n_2}$$

$$n_1 \sin \theta_1 = n_2 \sin \theta_2$$

(b)

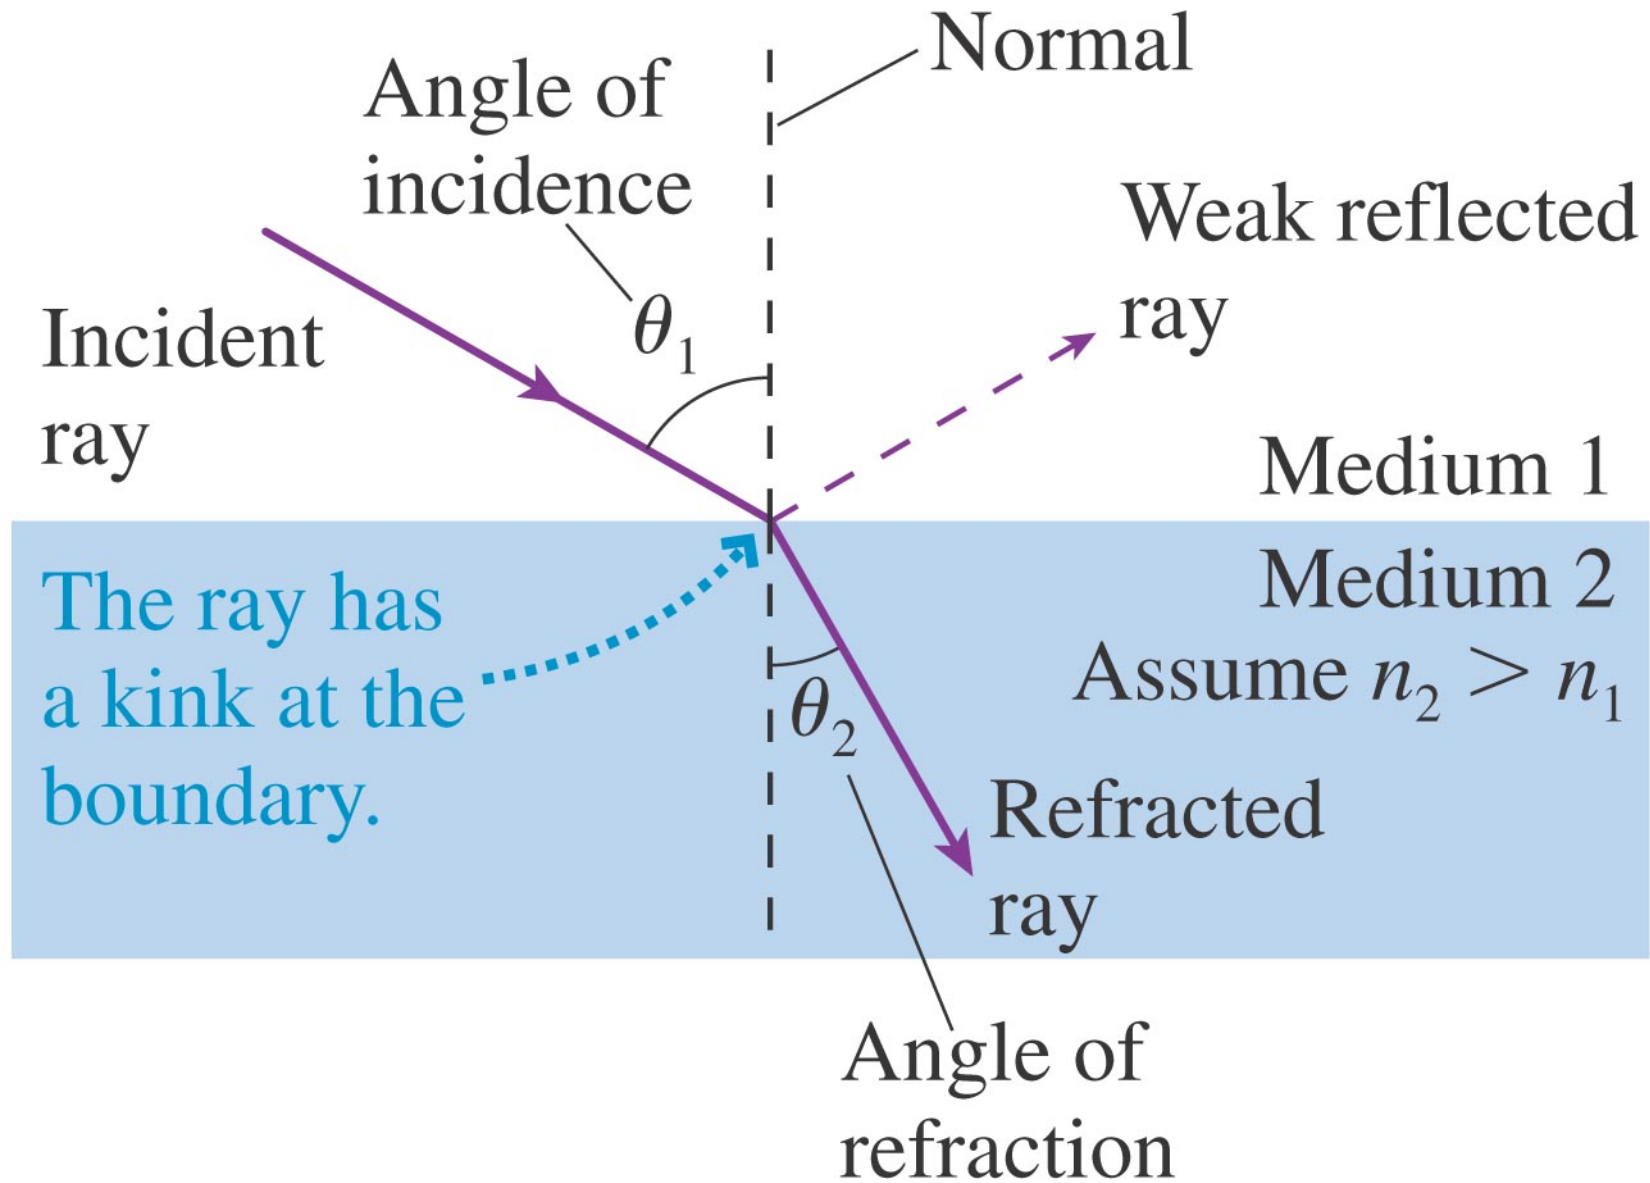

(c)

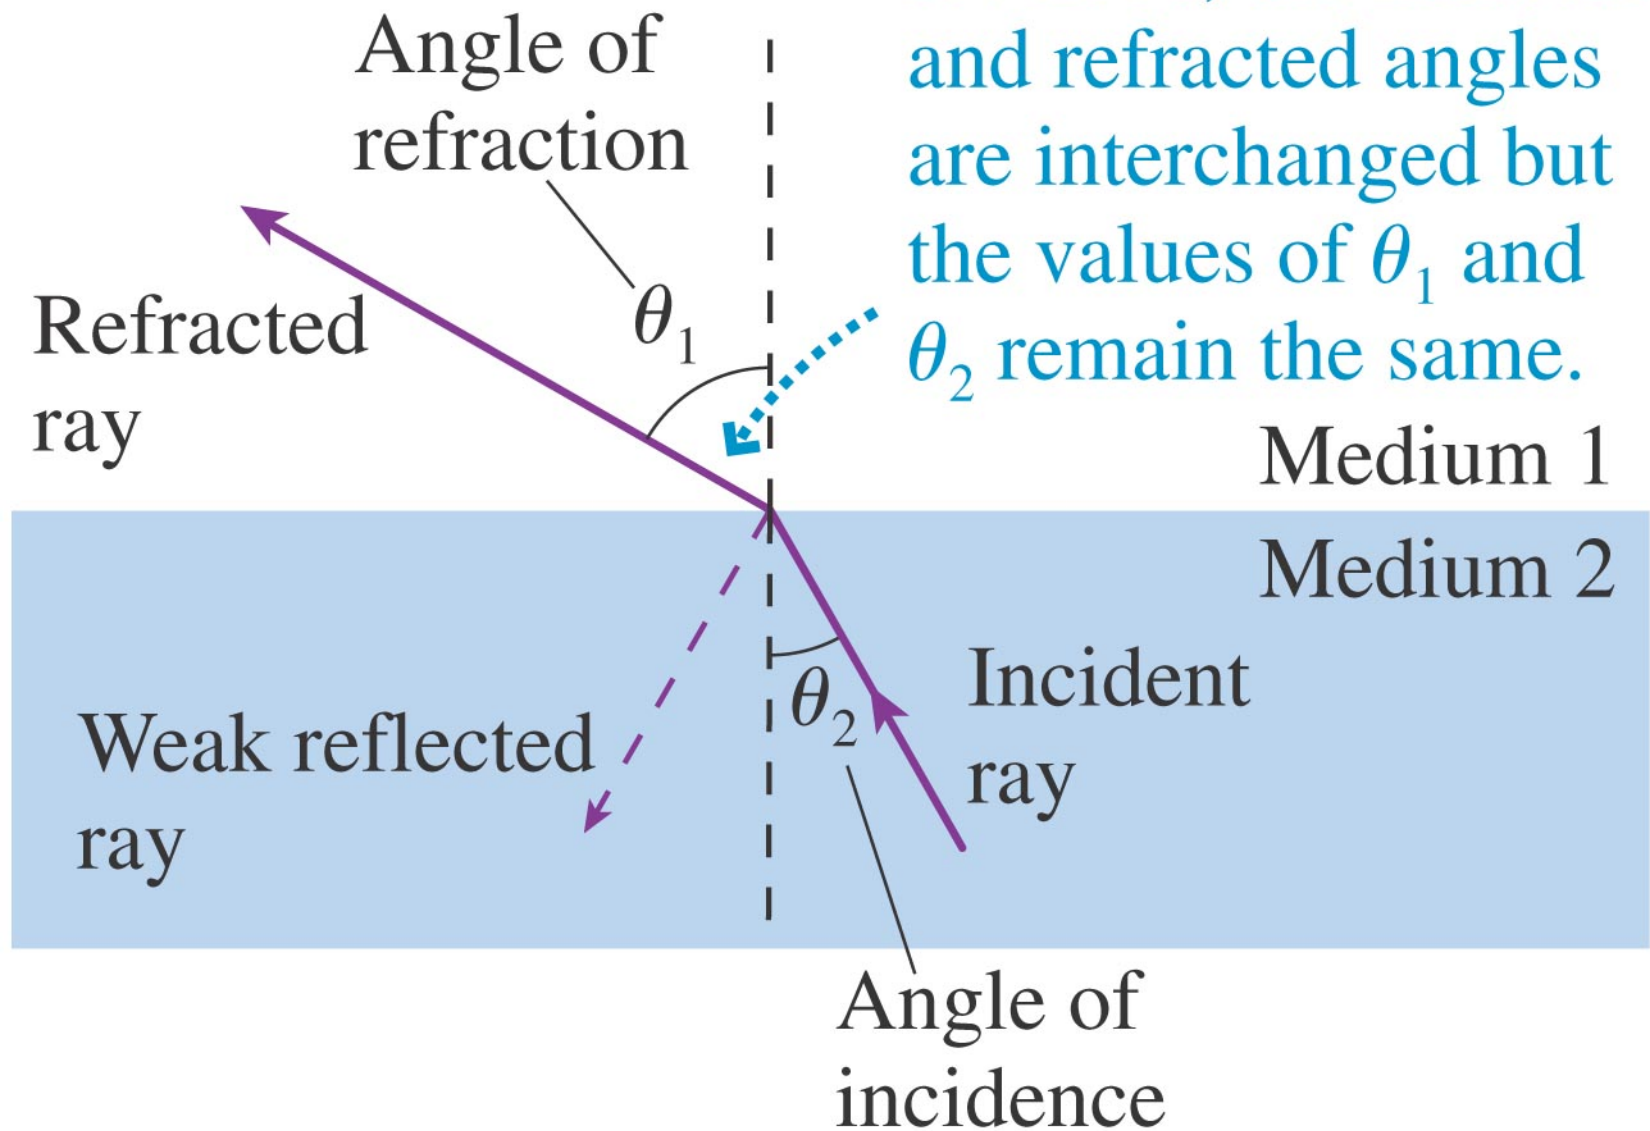


TABLE 23.1 Indices of refraction

Medium	<i>n</i>
Vacuum	1.00 exactly
Air (actual)	1.0003
Air (accepted)	1.00
Water	1.33
Ethyl alcohol	1.36
Oil	1.46
Glass (typical)	1.50
Polystyrene plastic	1.59
Cubic zirconia	2.18
Diamond	2.41
Silicon (infrared)	3.50

$$n = \frac{c}{v} = \sqrt{\frac{\epsilon\mu}{\epsilon_0\mu_0}}$$

For most material
 $n > 1$

Plasma
 $n < 1$

Total Internal Reflection

Region 1

$$\mathbf{E} = \text{Re} \left\{ \left(\hat{\mathbf{E}}_{inc} e^{i\mathbf{k}_i \cdot \mathbf{x}} + \hat{\mathbf{E}}_{ref} e^{i\mathbf{k}_r \cdot \mathbf{x}} \right) e^{-i\omega t} \right\}$$


Region 2

$$\mathbf{E} = \text{Re} \left\{ \left(\hat{\mathbf{E}}_{tran} e^{i\mathbf{k}_t \cdot \mathbf{x}} \right) e^{-i\omega t} \right\}$$

For boundary conditions at $z=0$ to be satisfied:

$$e^{ik_{ix}x} = e^{ik_{rx}x} = e^{ik_{tx}x}$$

$$k_{ix} = k_{rx} = k_{tx}$$

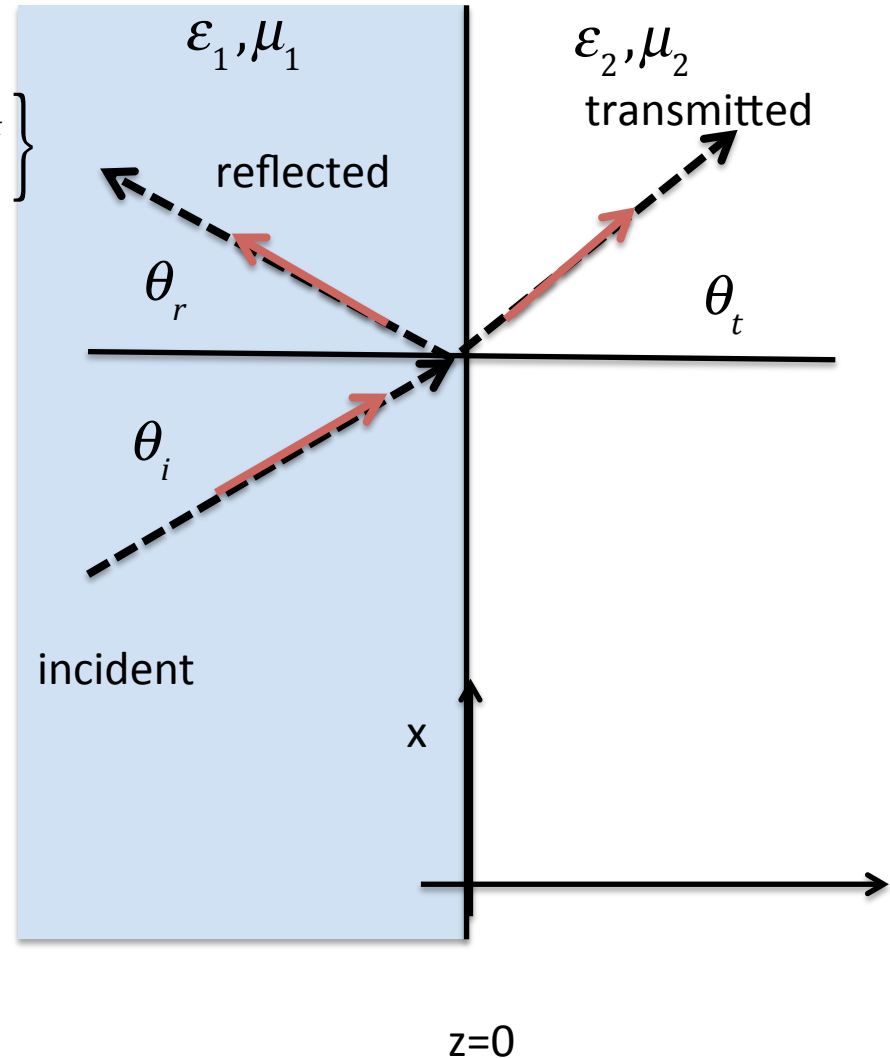

Region 1

$$k_1^2 = \omega^2 \epsilon_1 \mu_1 \quad k_1^2 = k_x^2 + k_{z1}^2$$

Region 2

$$k_2^2 = \omega^2 \epsilon_2 \mu_2 \quad k_2^2 = k_x^2 + k_{z2}^2$$

Snell's Law


$$\sin \theta_i = \frac{k_x}{k_1} = \frac{k_x}{\omega} v_1$$

$$\sin \theta_t = \frac{k_x}{k_2} = \frac{k_x}{\omega} v_2$$

$$\frac{\sin \theta_i}{v_1} = \frac{\sin \theta_t}{v_2}$$

No solution

$$\sin \theta_i > \frac{v_1}{v_2} = \sqrt{\frac{\epsilon_2}{\epsilon_1}}$$

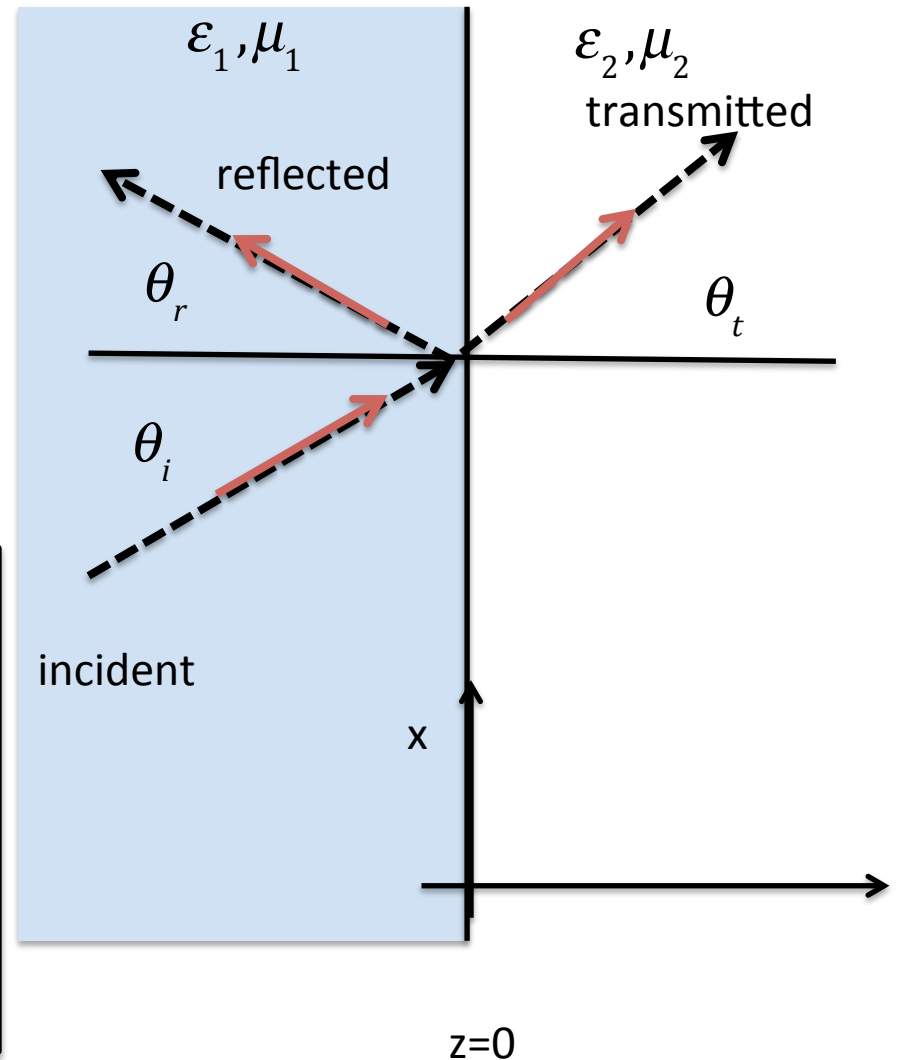

Evanescent Field

Region 2 $\mathbf{E} = \text{Re} \left\{ \left(\hat{\mathbf{E}}_{\text{tran}} e^{ik_x x + ik_{z2} z} \right) e^{-i\omega t} \right\}$

$$k_2^2 = k_{z2}^2 + k_x^2 = \omega^2 \epsilon_2 \mu_0$$


$$k_{z2}^2 = \omega^2 \epsilon_2 \mu_0 - k_x^2 \quad k_x^2 = \omega^2 \epsilon_1 \mu_0 \sin^2 \theta_i$$

$$k_{z2}^2 = \omega^2 \epsilon_1 \mu_0 \left[\frac{\epsilon_2}{\epsilon_1} - \sin^2 \theta_i \right]$$

If $1 > \sin^2 \theta_i > \frac{\epsilon_2}{\epsilon_1}$ then $k_{z2}^2 < 0$

$$k_{z2} = \pm i k_1 \sqrt{\left[\sin^2 \theta_i - \frac{\epsilon_2}{\epsilon_1} \right]} \equiv \pm i \kappa$$


$$\mathbf{E} = e^{\pm \kappa z} \text{Re} \left\{ \left(\hat{\mathbf{E}}_{\text{tran}} e^{ik_x x} \right) e^{-i\omega t} \right\}$$

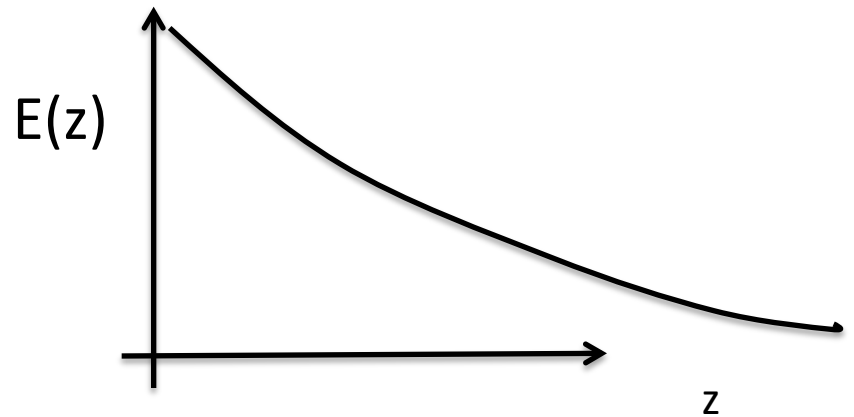

What is the reflection coefficient?


$$\rho = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

TE, E perpendicular to Pol

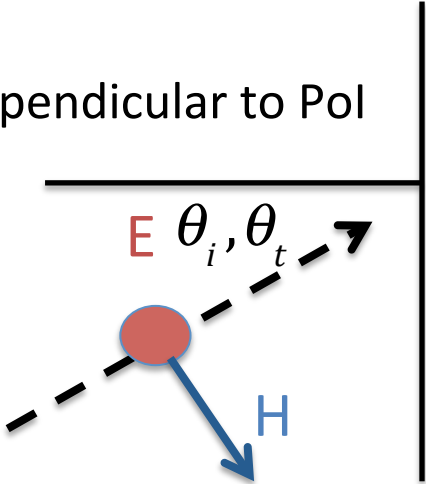

$$Z = \frac{E_{\text{tan}}}{H_{\text{tan}}} = ?$$


TM, E parallel to Pol

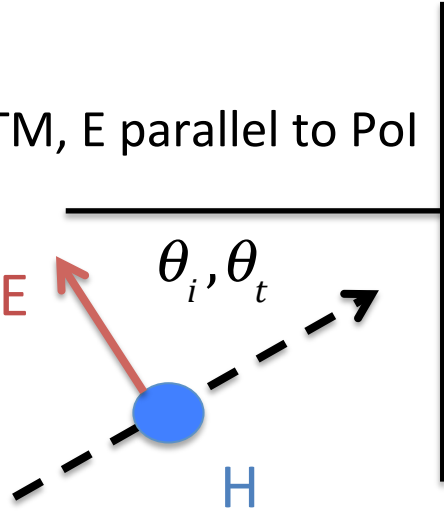


$$Z = \frac{E_{\text{tan}}}{H_{\text{tan}}} = ?$$

What is the reflection coefficient?

TE, E perpendicular to Pol

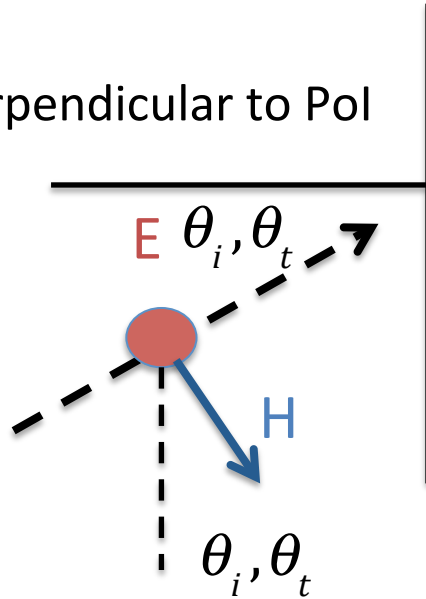

TM, E parallel to Pol

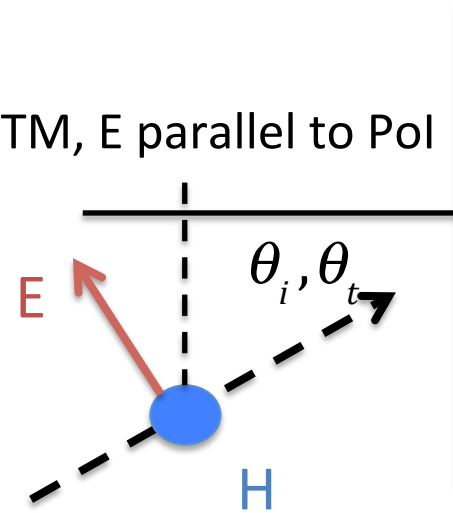

$$Z = \frac{E_{\tan}}{H_{\tan}} = \frac{|E|}{|H| \cos \theta} = \frac{\eta}{\cos \theta}$$

$$Z = \frac{E_{\tan}}{H_{\tan}} = \frac{|E| \cos \theta}{|H|} = \eta \cos \theta$$

Reflection Coefficient

$$\rho_{TE} = \frac{\eta_2 / \cos\theta_2 - \eta_1 / \cos\theta_1}{\eta_2 / \cos\theta_2 + \eta_1 / \cos\theta_1}$$

$$\rho_{TM} = \frac{\eta_2 \cos\theta_2 - \eta_1 \cos\theta_1}{\eta_2 \cos\theta_2 + \eta_1 \cos\theta_1}$$

Specialize to case $\mu_1 = \mu_2$ $\eta_2 / \eta_1 = \sqrt{\epsilon_1 / \epsilon_2}$

By Snell's Law $\cos\theta_2 = \sqrt{1 - \sin^2\theta_2} = \sqrt{1 - \frac{\epsilon_1}{\epsilon_2} \sin^2\theta_1}$

TE

$$\rho_{TE} = \frac{\eta_2 / \cos\theta_2 - \eta_1 / \cos\theta_1}{\eta_2 / \cos\theta_2 + \eta_1 / \cos\theta_1}$$

By Snell's Law

$$\cos\theta_2 = \sqrt{1 - \sin^2\theta_2} = \sqrt{1 - \frac{\epsilon_1}{\epsilon_2} \sin^2\theta_1}$$

$$\rho_{TE} = \frac{\sqrt{\epsilon_1 / \epsilon_2} \cos\theta_1 - \sqrt{1 - (\epsilon_1 / \epsilon_2) \sin^2\theta_1}}{\sqrt{\epsilon_1 / \epsilon_2} \cos\theta_1 + \sqrt{1 - (\epsilon_1 / \epsilon_2) \sin^2\theta_1}}$$

TM

$$\rho_{TM} = \frac{\eta_2 \cos\theta_2 - \eta_1 \cos\theta_1}{\eta_2 \cos\theta_2 + \eta_1 \cos\theta_1}$$

By Snell's Law

$$\cos\theta_2 = \sqrt{1 - \sin^2\theta_2} = \sqrt{1 - \frac{\epsilon_1}{\epsilon_2} \sin^2\theta_1}$$

$$\rho_{TM} = \frac{\sqrt{\epsilon_1/\epsilon_2} \sqrt{1 - (\epsilon_1/\epsilon_2) \sin^2\theta_1} - \cos\theta_1}{\sqrt{\epsilon_1/\epsilon_2} \sqrt{1 - (\epsilon_1/\epsilon_2) \sin^2\theta_1} + \cos\theta_1}$$

$$\text{TE} \quad \rho_{TE} = \frac{\sqrt{\epsilon_1 / \epsilon_2} \cos \theta_1 - \sqrt{1 - (\epsilon_1 / \epsilon_2) \sin^2 \theta_1}}{\sqrt{\epsilon_1 / \epsilon_2} \cos \theta_1 + \sqrt{1 - (\epsilon_1 / \epsilon_2) \sin^2 \theta_1}}$$

$$\text{TM} \quad \rho_{TM} = \frac{\sqrt{\epsilon_1 / \epsilon_2} \sqrt{1 - (\epsilon_1 / \epsilon_2) \sin^2 \theta_1} - \cos \theta_1}{\sqrt{\epsilon_1 / \epsilon_2} \sqrt{1 - (\epsilon_1 / \epsilon_2) \sin^2 \theta_1} + \cos \theta_1}$$

Normal incidence

$$\theta = 0$$

$$\rho_{TE} = \frac{\sqrt{\epsilon_1 / \epsilon_2} - 1}{\sqrt{\epsilon_1 / \epsilon_2} + 1}$$

$$\rho_{TM} = \frac{\sqrt{\epsilon_1 / \epsilon_2} - 1}{\sqrt{\epsilon_1 / \epsilon_2} + 1}$$

Grazing incidence

$$\theta = \pi / 2, \quad \epsilon_1 < \epsilon_2$$

$$\rho_{TE} = -1$$

$$\rho_{TM} = 1$$

Critical angle


$$\sin \theta = \sqrt{\epsilon_2 / \epsilon_1},$$

$$\epsilon_2 / \epsilon_1 < 1$$

$$\rho_{TE} = 1$$


$$\rho_{TM} = -1$$

Case1 $\epsilon_1 < \epsilon_2$

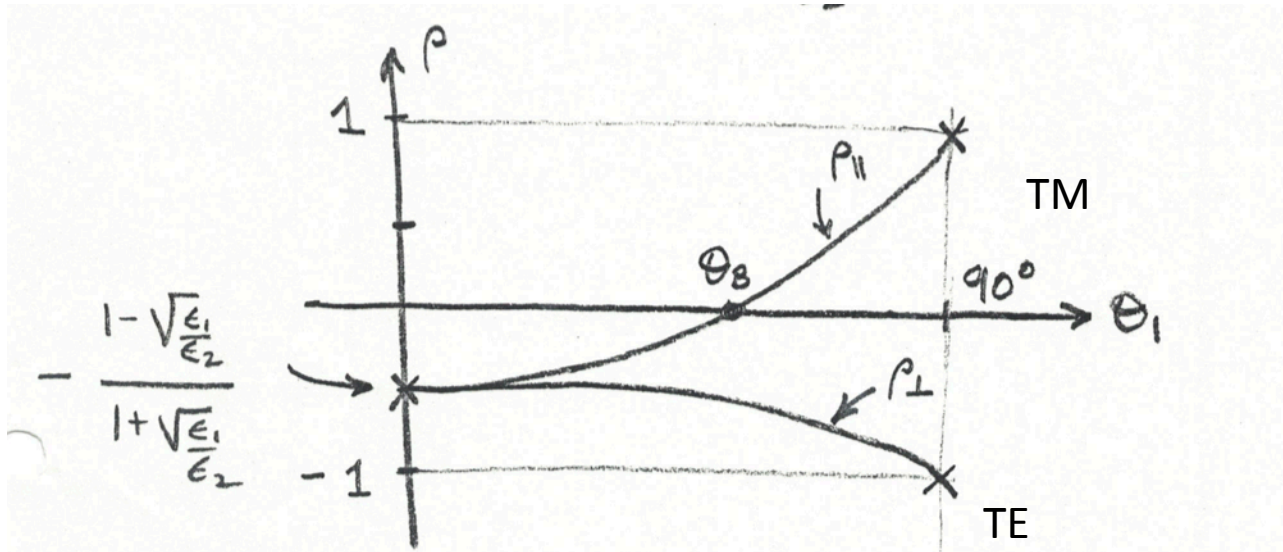



Power reflection

Brewster's angle

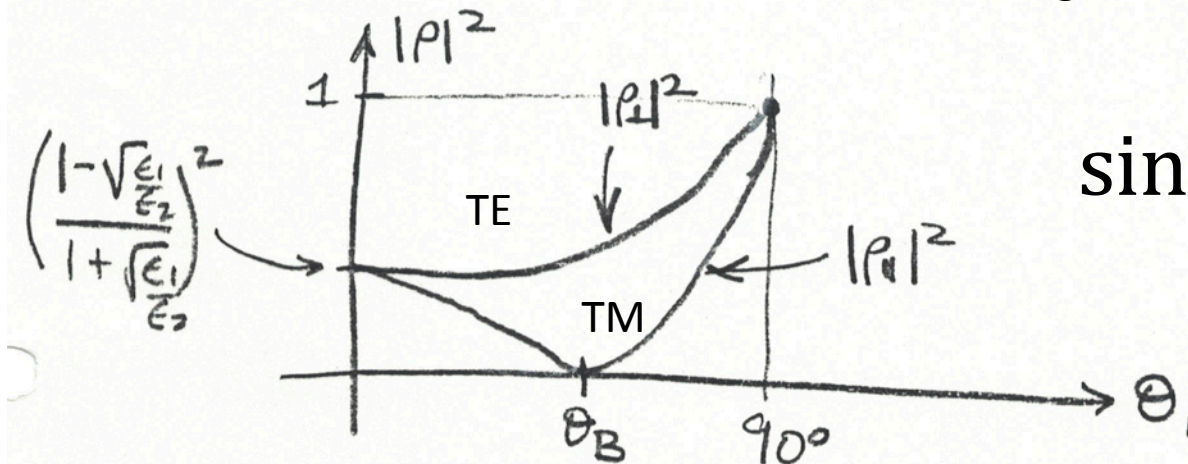

$$\sin \theta_B = \frac{\epsilon_1}{\epsilon_1 + \epsilon_2}$$

Case 2 $\epsilon_1 > \epsilon_2$

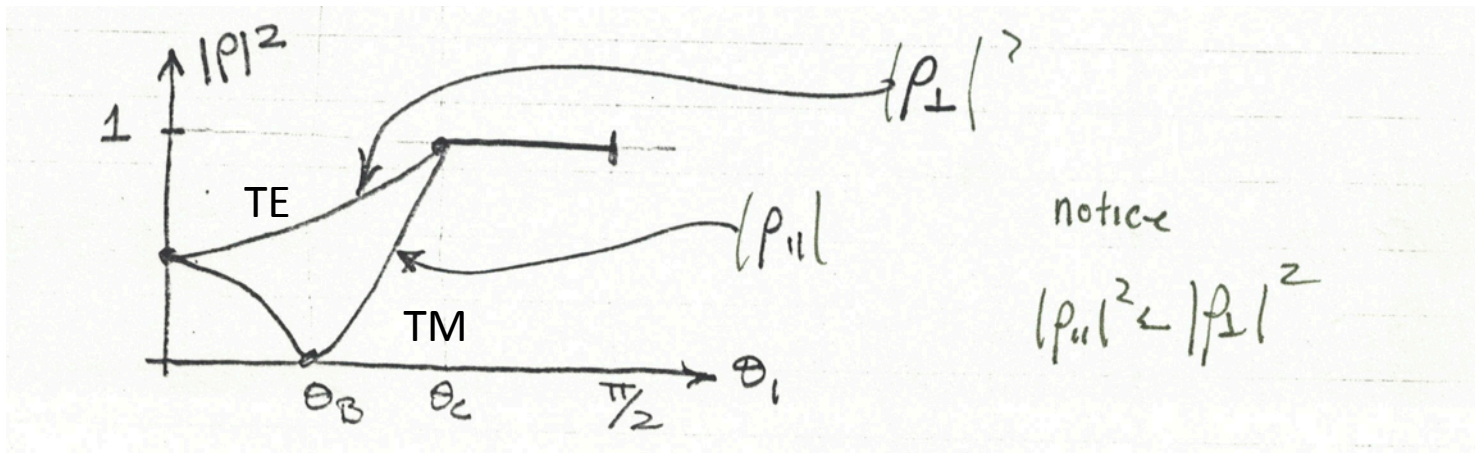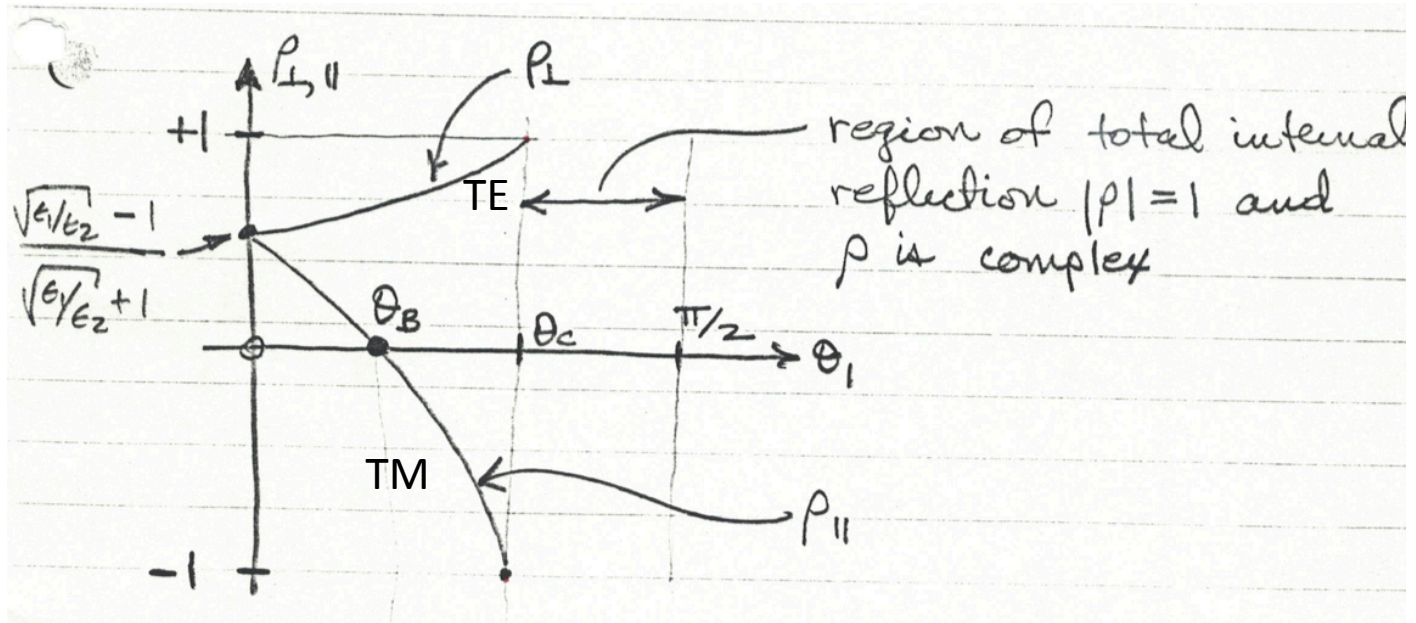

Polarized Lenses

