



# MOTOROLA

## DUAL COMPLEMENTARY PAIR PLUS INVERTER

The MC14007UB multi-purpose device consists of three N-channel and three P-channel enhancement mode devices packaged to provide access to each device. These versatile parts are useful in inverter circuits, pulse-shapers, linear amplifiers, high input impedance amplifiers, threshold detectors, transmission gating, and functional gating.

- Diode Protection on All Inputs
- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- Capable of Driving Two Low-power TTL Loads or One Low-power Schottky TTL Load Over the Rated Temperature Range
- Pin-for-Pin Replacement for CD4007A or CD4007UB
- This device has 2 outputs without ESD Protection. Anti-static precautions must be taken.

### MAXIMUM RATINGS\* (Voltages Referenced to V<sub>SS</sub>)


Symbol	Parameter	Value	Unit
V <sub>DD</sub>	DC Supply Voltage	-0.5 to +18.0	V
V <sub>in</sub> , V <sub>out</sub>	Input or Output Voltage (DC or Transient)	-0.5 to V <sub>DD</sub> + 0.5	V
I <sub>in</sub> , I <sub>out</sub>	Input or Output Current (DC or Transient), per Pin	±10	mA
P <sub>D</sub>	Power Dissipation, per Package	500	mW
T <sub>stg</sub>	Storage Temperature	-65 to +150	°C
T <sub>L</sub>	Lead Temperature (8-Second Soldering)	260	°C

Maximum Ratings are those values beyond which damage to the device may occur.

Temperature Derating: Plastic "P" and D/DW" Packages: -7.0 mW/°C From 65°C To 125°C


Ceramic "L" Packages: -12 mW/°C From 100°C To 125°C

FIGURE 1 — TYPICAL APPLICATION: 2-INPUT ANALOG MULTIPLEXER

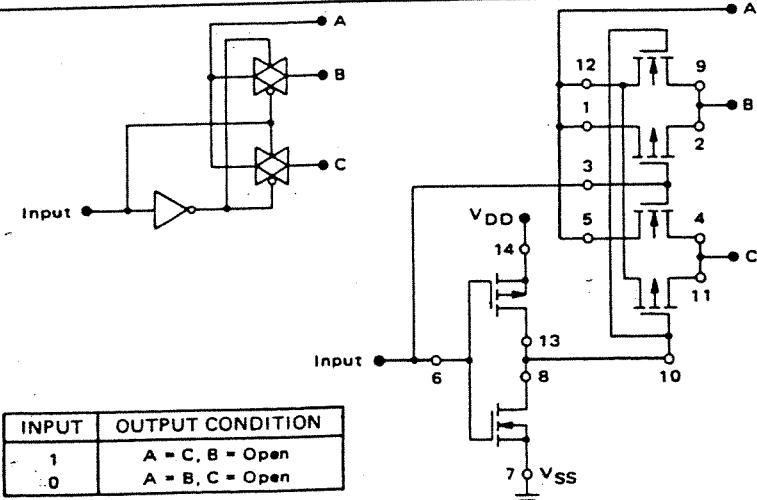


Substrates of P-channel devices internally connected to V<sub>DD</sub>; substrates of N-channel devices internally connected to V<sub>SS</sub>.

# MC14007UB



L SUFFIX  
CERAMIC  
CASE 632



P SUFFIX  
PLASTIC  
CASE 646



D SUFFIX  
SOIC  
CASE 751A

### ORDERING INFORMATION

MC14XXXUBCP Plastic  
MC14XXXUBCL Ceramic  
MC14XXXUBD SOIC

T<sub>A</sub> = -55° to 125°C for all packages.

### PIN ASSIGNMENT

